



外形安装尺寸 Overall dimension

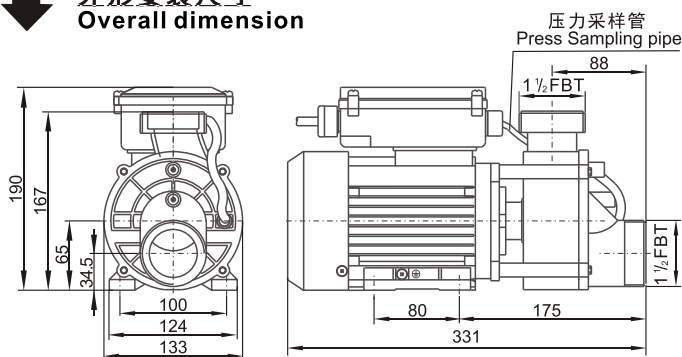

EN 60335-1
EN 60335-2-41
EN 62233
ERP547

* 该泵设有水压式无水保护,压力采样和电泵联成一体。压力开关的导通压力直接采样于电泵旋转时自身产生的压力,当泵体内没有介质时,水压开关无法导通,从而实现电泵在浴缸内没有水的情况下不能运转的目的。

- The pump has no-water protection, which is connected with pressure device. When there is no liquid inside of pump, the pressure switch works in order to achieve no-water protection.

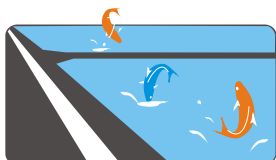

海水养殖循环过滤
Mariculture circulation filter





浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

性能曲线 Performance curves

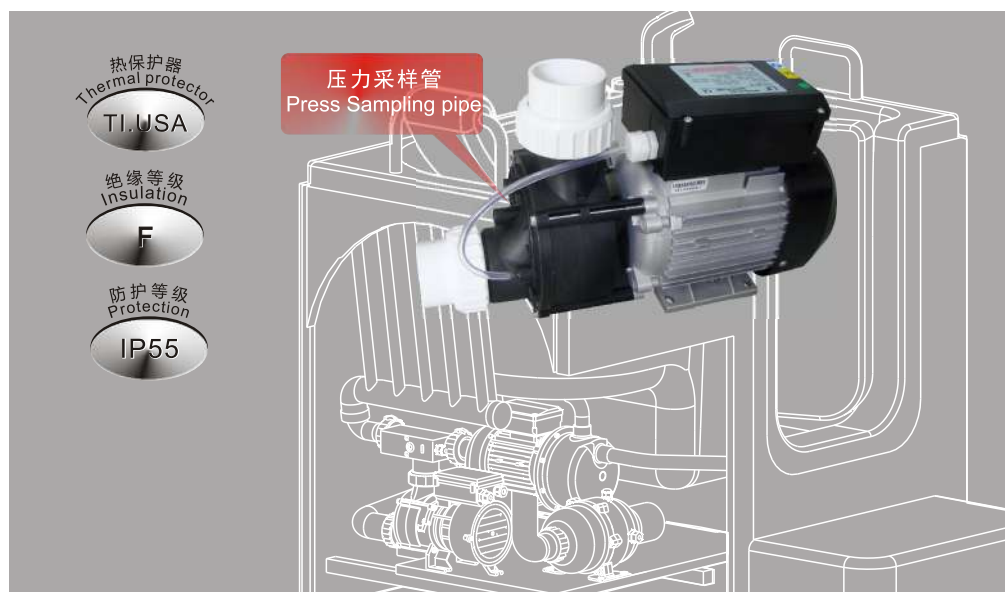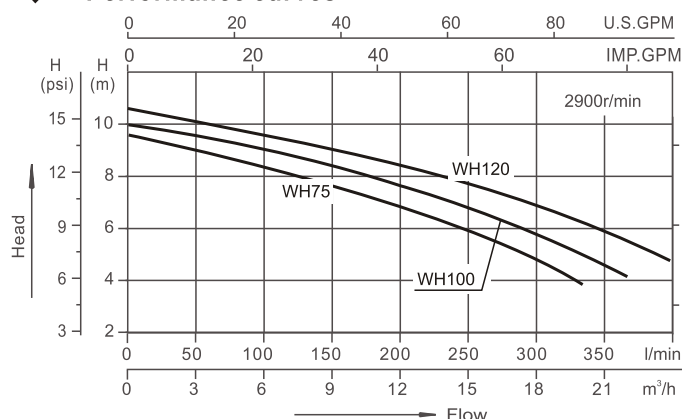

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P ₁)		电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
WH75	335	9.5	220-240/50	0.55	0.75	3.2	48.5or50	7.2	365×150×250
WH100	365	10	220-240/50	0.75	1.0	3.8	48.5or50	7.8	365×150×250
WH120	400	10.5	220-240/50	0.9	1.2	4.6	48.5or50	8.2	365×150×250

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name	
1	接头螺母	Tie Nut
2	接头	Tie
3	O形圈	O-Ring
4	六角头螺钉	Hexagon screw
5	泵盖	Pump Cover
6	气管	Air tube
7	叶轮	Impeller
8	机械密封	Mechanical seal
9	O形圈	O-Ring
10	泵壳	Pump Casing
11	电机	Motor

