


外形安装尺寸


Overall dimension

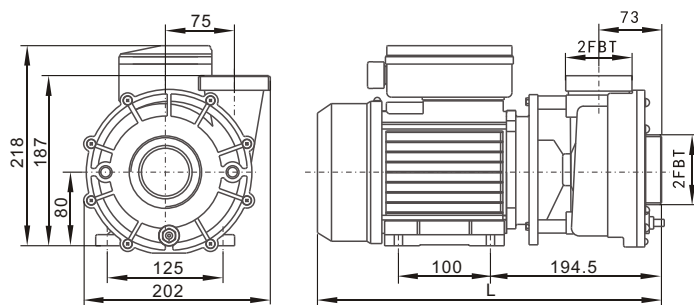

型号 Model	L
LP150	382
LP200	382
LP250	382
LP300	397

性能曲线


Performance curves

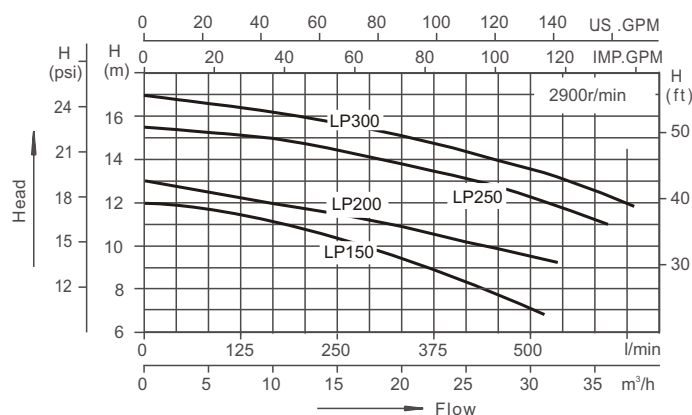

EN 60335-1
EN 60335-2-41
EN 60335-2-60
EN 62233
ERP547

SAA

AS/NZS60335.1
AS/NZS60335.2.41
AS/NZS 60335.2.60



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

热保护器
Thermal protector


TI, USA

绝缘等级
Insulation

F

防护等级
Protection

IP55

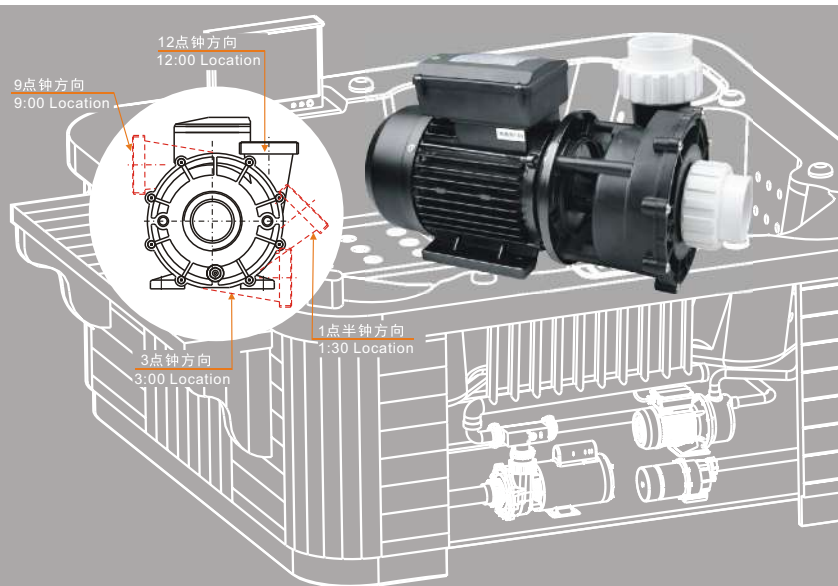

技术参数列表

Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P ₁)		电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
LP150	520	12	220-240/50	1.1	1.5	5.8	60.3or63	12	425×225×290
LP200	535	13	220-240/50	1.5	2.0	7.0	60.3or63	12.7	425×225×290
LP250	600	15.5	220-240/50	1.85	2.5	8.0	60.3or63	15.5	425×225×290
LP300	635	17	220-240/50	2.2	3.0	10	60.3or63	16.3	425×225×290

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	螺塞 Plug
5	O形圈 O-Ring
6	十字槽圆柱头带垫螺钉 Cross slotted cylinder head with set screw
7	泵盖 Pump Cover
8	叶轮活动口环 Impeller activity ring
9	叶轮 Impeller
10	机械密封 Mechanical seal
11	O形圈 O-Ring

序号 NO.	名称 Name
12	泵体 Pump body
13	电机 Motor
14	六角头螺栓和平垫圈组合件 Hexagon head bolt and plain washer assembly

