


外形安装尺寸

Overall dimension




型号 Model	外形尺寸 Shape size (mm)				
	A	H	L	L1	F
WP200-I	202	197	416	197	73
WP250-I	202	197	416	197	73
WP300-I	202	197	416	197	73
WP400-I	211	210	421	200	75
WP200-II	202	197	434	197	73
WP250-II	202	197	434	197	73
WP300-II	202	197	434	197	73

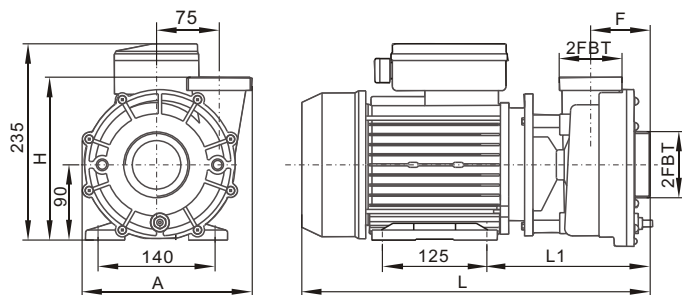

EN 60335-1
EN 60335-2-41
EN 60335-2-60
EN 62233
ERP547

SAA

AS/NZS60335.1
AS/NZS60335.2.41
AS/NZS 60335.2.60



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

工作条件



介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

性能曲线

Performance curves

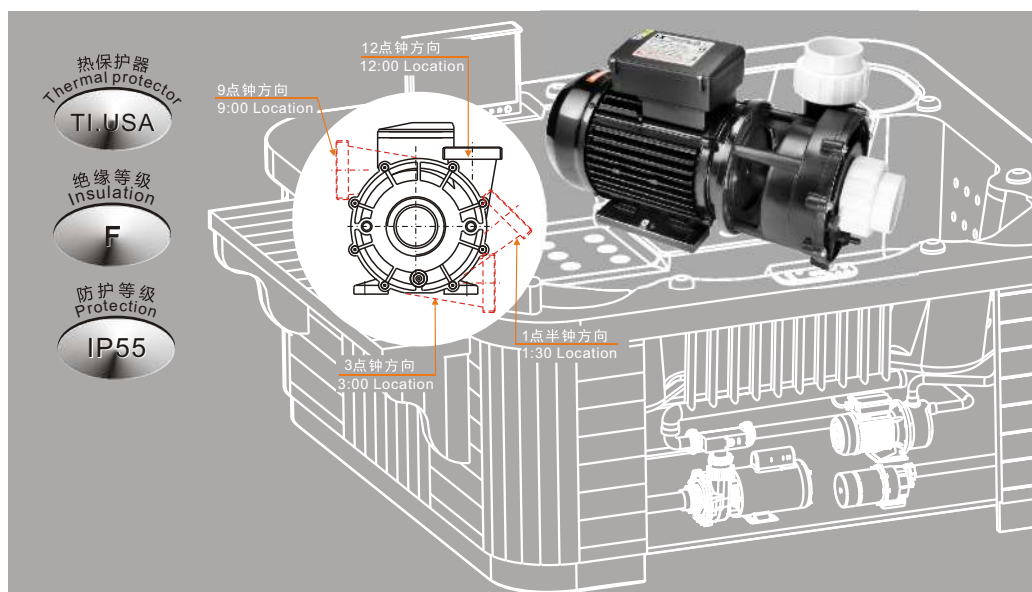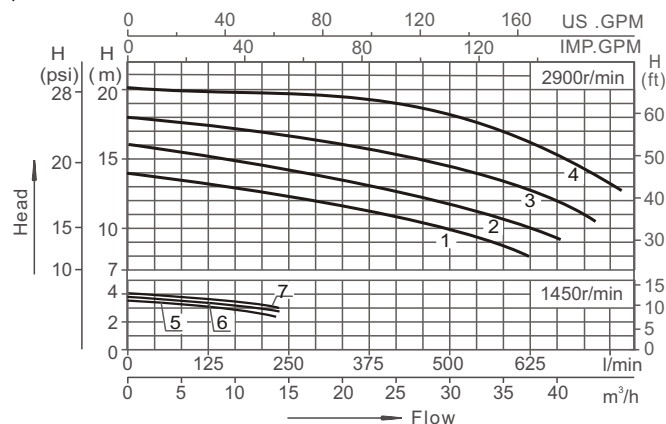

技术参数列表

Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P ₁)		电流 Amps	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
					kW	HP				
WP200-I	620	14	1	220-240/50	1.5	2.0	7.0	60.3or63	15.3	460×225×295
WP250-I	670	16	2	220-240/50	1.85	2.5	9.0	60.3or63	16.3	460×225×295
WP300-I	730	18	3	220-240/50	2.2	3.0	10	60.3or63	18	460×225×295
WP400-I	780	19	4	220-240/50	3.0	4.0	14	60.3or63	19.2	460×225×295
WP200-II	280	3.5	5	220-240/50	(Low speed)0.35	3/8	2.0	60.3or63	15.5	460×225×295
	620	14	1		(High speed)1.5	2.0	7.0			
WP250-II	300	3.5	6	220-240/50	(Low speed)0.4	1/2	2.5	60.3or63	17	460×225×295
	670	16	2		(High speed)1.85	2.5	9.0			
WP300-II	330	4.0	7	220-240/50	(Low speed)0.45	5/8	3.0	60.3or63	18.5	460×225×295
	730	18	3		(High speed)2.2	3.0	10			

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	注放水螺塞 Hexagon Screw
5	O形圈 O-Ring
6	十字盘头螺钉组合件 cross raised head screw assembling
7	泵盖 Pump Cover
8	O形圈 O-Ring
9	叶轮活动口环 Impeller activity ring
10	叶轮 Impeller

序号 NO.	名称 Name
11	机械密封 Mechanical seal
12	泵壳 Pump Casing
13	平垫圈 Plain washer
14	六角螺栓 Plastic spacer
15	电机 Motor

