


外形安装尺寸 Overall dimension

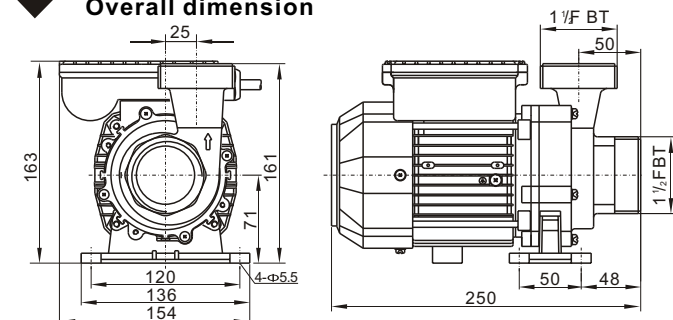

注：需选配铸铝底脚，请联系我司业务人员。
If you need cast aluminum foot, please contact our sales staff.

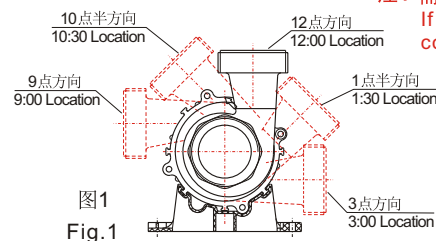


图1
Fig.1

EN 60335-1
EN 60335-2-41
EN 62233
ERP547



UL
UL FILE E342873

UL 1081
CSA C22.2 NO. 108-14

适用范围

- * SPA水循环, 冷却装置, 臭氧处理
- * 水族馆海水或淡水的循环

Applications

- * SPA water circulation, chillers systems, ozone treatment.
- * The circulation of sea or fresh water in an aquarium.

特点

- * 电泵过流部件采用高强度工程塑料，配以特殊碳化硅材质的机械密封；
- * 叶轮采用开式结构，设计有回流孔，充分保证了机械密封的冷却，提高其使用寿命；
- * 噪音低、效率高、使用寿命长；
- * 电泵出水口方向可调(如图1所示)。

Features

- * The wet ends are made of high strength engineering plastics with special mechanical seal made of silicon carbide material.
- * The impeller adopts open structure and the reflux hole is designed, which ensures the cooling of the mechanical seal and improves its service life.
- * Low noise, high efficiency and long service life.
- * Outlet direction can be adjustable (Fig.1).



工作条件

介质温度: 0~+50℃
环境温度: ≤+50℃
最大工作压力: 0.3MPa

Working conditions



Medium temperature: 0~+50℃
Environmental temperature: ≤+50℃
Max. Working pressure: 0.3MPa

性能曲线 Performance curves

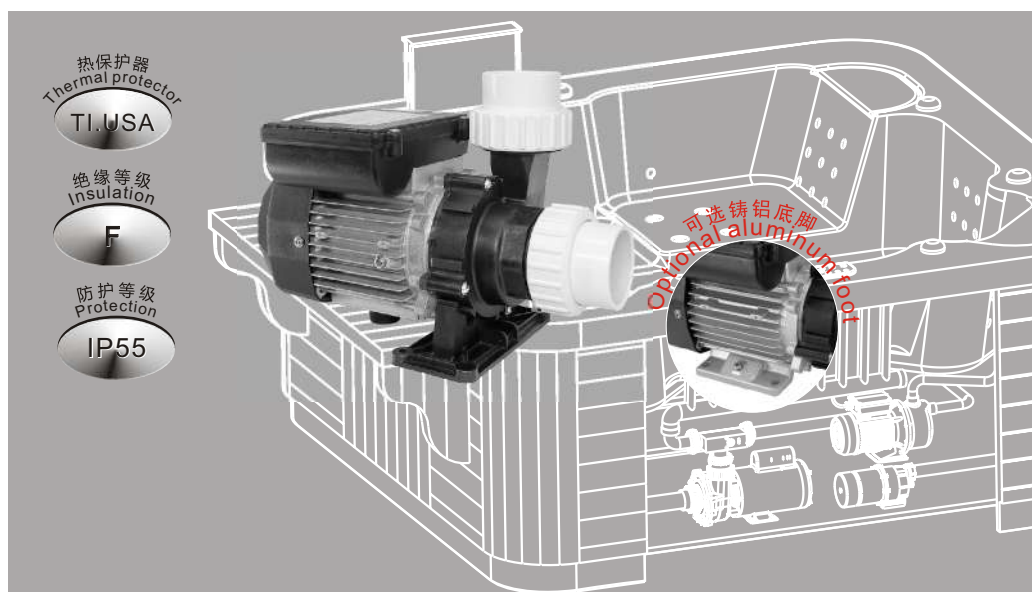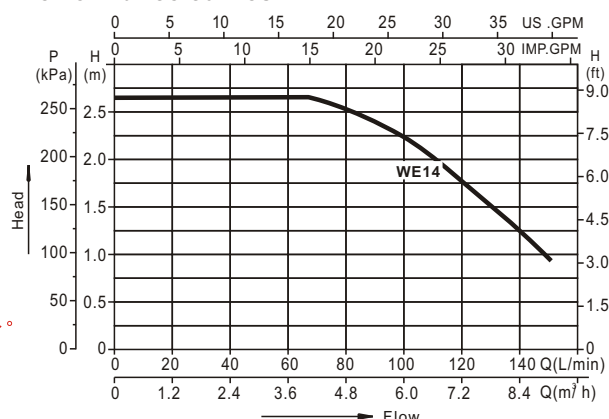

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (L/min)	最大扬程 Hmax (m)	输入功率 Power(P1) W	电流 (Amps) 220-240V 110-120V	转速 Speed(rpm) 50Hz 60Hz	毛重 G.W (Kg)	包装尺码 Packing size (mm)
WE14	153	2.7	250	1.0 2.0	2900 3450	3.7	275×170×225

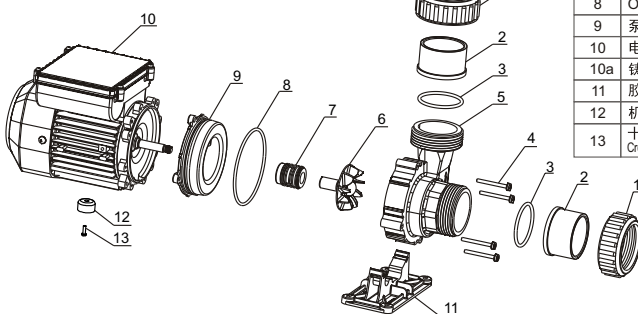

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-ring
4	十字槽盘头螺钉和平垫圈组合件 Cross recessed pan head screw and washer assemblies
5	泵壳 Pump Casing
6	叶轮 Impeller
7	机械密封 Mechanical Seal
8	O形圈 O-ring
9	泵盖 Pump Cover
10	电机 Motor
10a	铸铝底脚电机 Aluminum foot motor
11	胶垫 Rubber gasket
12	机脚 Bracket
13	十字槽盘头螺钉和平垫圈组合件 Cross recessed pan head screw and washer assemblies