


WTC-M


外形安装尺寸 Overall dimension

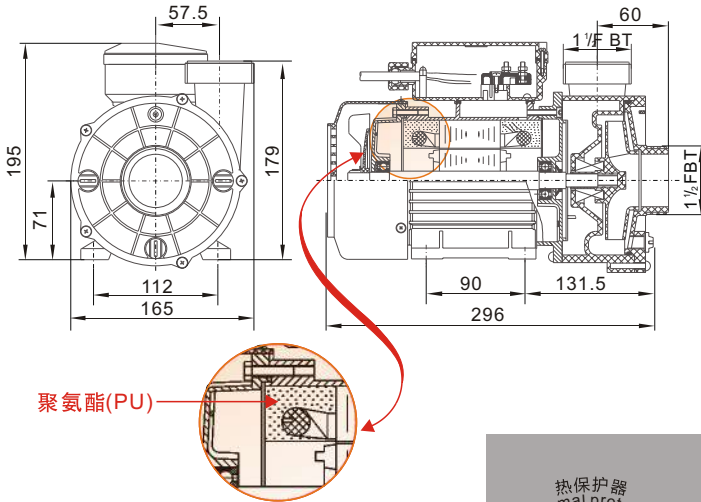

聚氨酯(PU)

- *定子采用塑封工艺,防水性能好;
- *E级温升考核,温升低,寿命长。
- The stator adopts plastic sealing technology with good waterproof;
- Grade E temperature rise assessment, low temperature rise, long life.

ERP547



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment



工作条件

介质温度: 5-50℃
环境温度: <75℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: <75℃
Max. working pressure: 0.3MPa

性能曲线 Performance curves

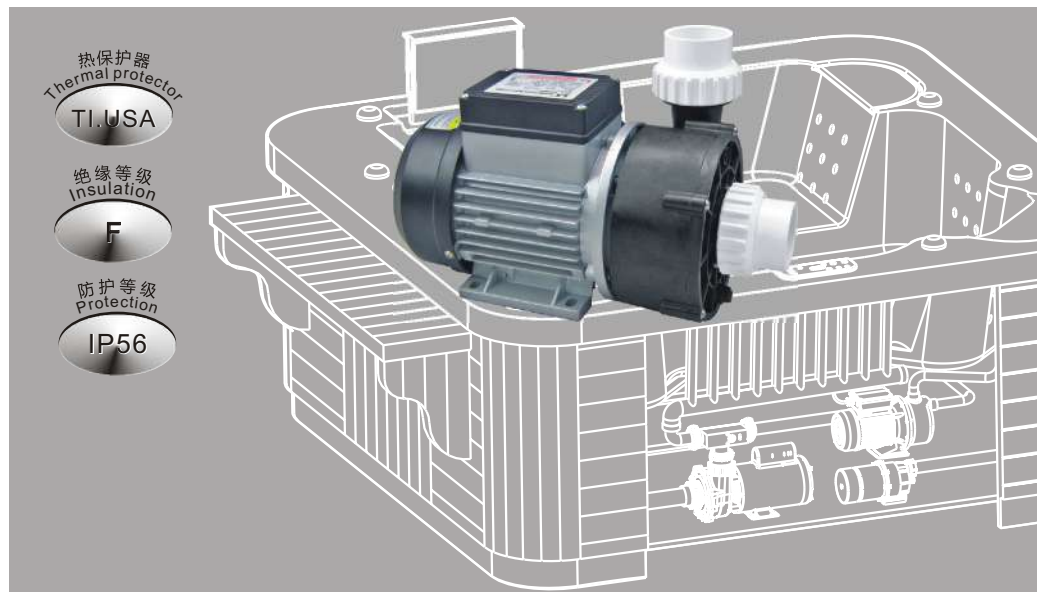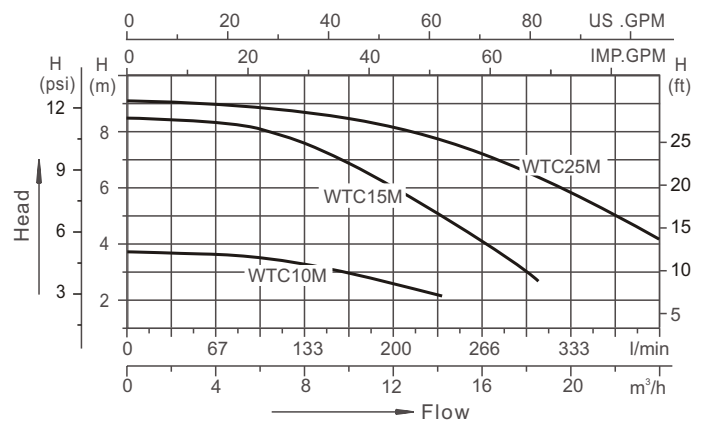

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	转速 Speed (r/min)	输入功率 Power(P ₁) kW HP	电流 Amps	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
WTC10M	240	3.8	220-240/50	1400	0.25 0.35	1.6	48.5or50	5.7	330×180×255
WTC15M	300	8.5	220-240/50	2900	0.55 0.75	3.2	48.5or50	6.8	330×180×255
WTC25M	400	9	220-240/50	2900	0.75 1.0	3.5	48.5or50	8.2	330×180×255

序号 NO.	名称 Name
1	接头螺母 Tie Nut
2	接头 Tie
3	O形圈 O-Ring
4	十字盘头螺钉和平垫圈组合件 cross recessed pan head screw and washer assemblies
5	泵盖 Pump Cover
6	叶轮 Impeller
7	机械密封 Mechanical seal
8	O形圈 O-Ring
9	泵壳 Pump Casing
10	电机 Motor

