


外形安装尺寸 Overall dimension




型号 Model	L
STP25	443
STP35	443
STP50	443
STP75	465
STP100	465
STP120	465

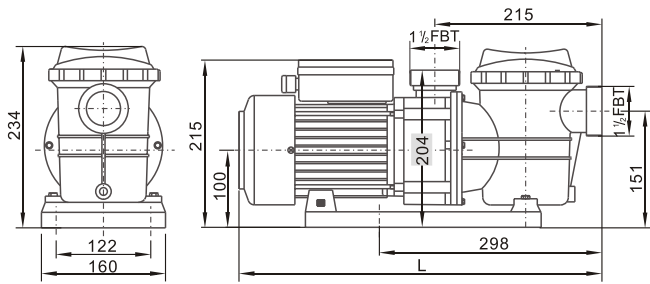

EN 60335-1
EN 60335-2-41
EN 62233
ERP547

SAA

AS/NZS60335.1
AS/NZS60335.2.41





海水养殖循环过滤
Mariculture circulation filter



泳池循环过滤
Recirculation of water in swimming pool equipment

性能曲线 Performance curves

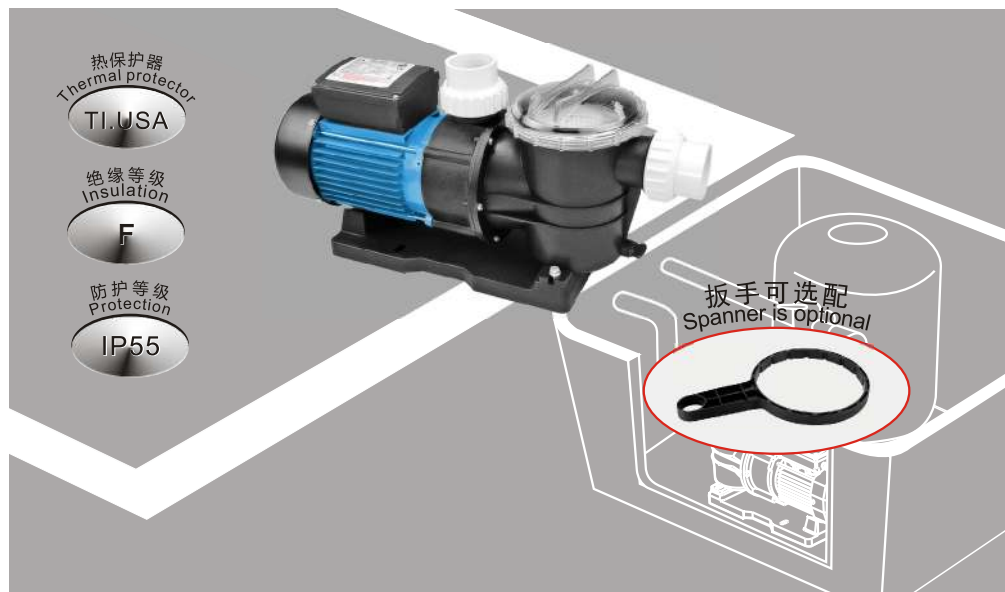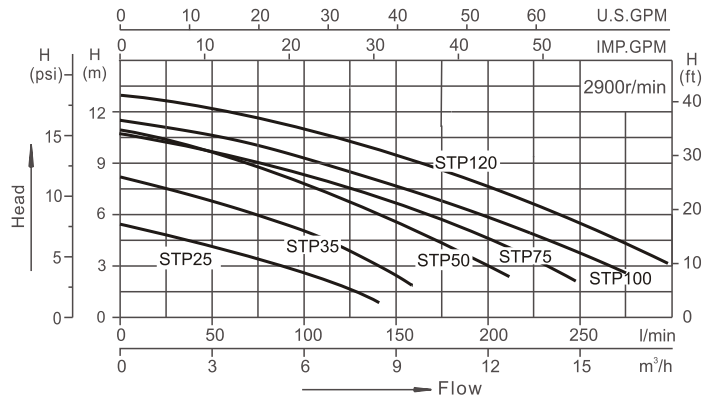

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P ₁)		电流 (Amps)	接口尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
STP25	140	5	220-240/50	0.18	0.25	0.9	48.5or50	6	470×180×295
STP35	160	8	220-240/50	0.25	0.35	1.6	48.5or50	6.5	470×180×295
STP50	210	11	220-240/50	0.37	0.5	2.0	48.5or50	7	470×180×295
STP75	240	10.5	220-240/50	0.55	0.75	3.2	48.5or50	8.8	495×195×295
STP100	275	11	220-240/50	0.75	1.0	3.8	48.5or50	9.5	495×195×295
STP120	300	13	220-240/50	0.9	1.2	4.6	48.5or50	9.8	495×195×295

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

