




## 外形安装尺寸 Overall dimension

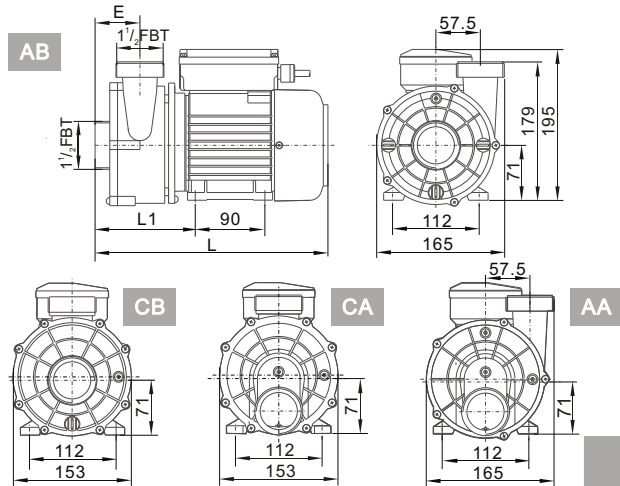

| 型号<br>Model | 泵型式<br>Pump type | 外形尺寸<br>Shape size (mm) |     |     |
|-------------|------------------|-------------------------|-----|-----|
|             |                  | E                       | L   | L1  |
| WTC100      | AA               | 97                      | 339 | 169 |
|             | CA               | 102                     |     |     |
|             | AB               | 60                      | 302 | 132 |
|             | CB               | 65                      |     |     |
| WTC120      | AA               | 97                      | 336 | 169 |
|             | CA               | 102                     |     |     |
|             | AB               | 60                      | 302 | 132 |
|             | CB               | 65                      |     |     |
| WTC150      | AA               | 97                      | 336 | 169 |
|             | CA               | 102                     |     |     |
|             | AB               | 60                      | 302 | 132 |
|             | CB               | 65                      |     |     |
| WTC200      | AA               | 97                      | 336 | 169 |
|             | CA               | 102                     |     |     |
|             | AB               | 60                      | 302 | 132 |
|             | CB               | 65                      |     |     |

多种进出水口组合方式供选择。  
A variety of inlet and outlet are optional.


## 性能曲线 Performance curves

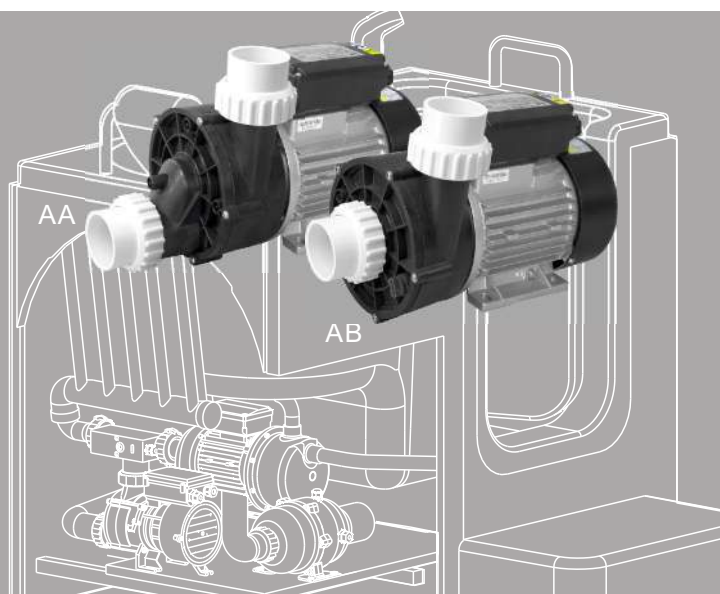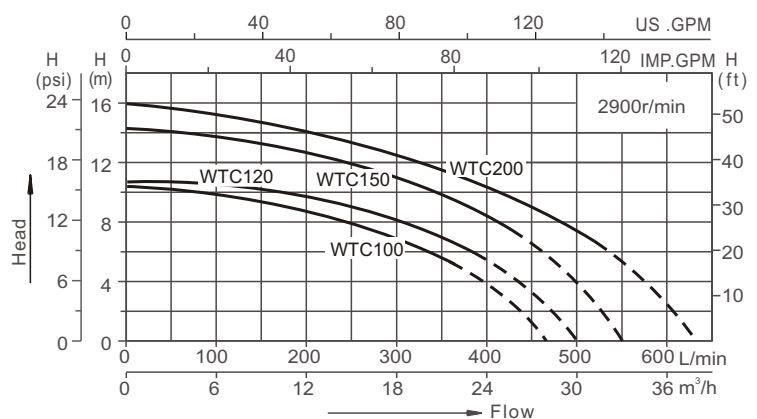

Type Approved  
Safety  
Regular Production  
Surveillance  
www.tuv.com  
ID: 0000021818



EN 60335-1  
EN 60335-2-41  
EN 60335-2-60  
EN 62233  
ERP547

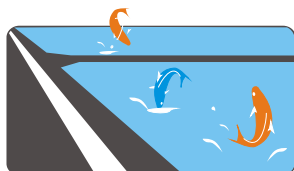

海水养殖循环过滤  
Mariculture circulation filter

### 工作条件

介质温度: 5-50℃  
环境温度: ≤50℃  
最大工作压力: 0.3MPa

### Working conditions

Medium temperature: 5-50℃  
Environmental temperature: ≤50℃  
Max. working pressure: 0.3MPa

## 技术参数列表 Technical parameter list

| 型号<br>Model | 最大流量<br>Qmax<br>(l/min) | 最大扬程<br>Hmax<br>(m) | 电压/频率<br>V/Hz | 输入功率<br>Power(P1) |     | 电流<br>(Amps) | 接头尺寸<br>Fitting size<br>(mm) | 重量<br>G.W<br>(Kg) | 包装尺码<br>Packing size<br>(mm) |
|-------------|-------------------------|---------------------|---------------|-------------------|-----|--------------|------------------------------|-------------------|------------------------------|
| WTC100      | 460                     | 10.5                | 220-240/50    | 0.75              | 1.0 | 3.8          | 48.5or50                     | 7.5               | AA<br>CA 365×190×250         |
|             |                         |                     |               |                   |     |              |                              |                   | AB<br>CB 325×190×250         |
| WTC120      | 520                     | 11.5                | 220-240/50    | 0.9               | 1.2 | 4.6          | 48.5or50                     | 8.6               | AA<br>CA 365×190×250         |
|             |                         |                     |               |                   |     |              |                              |                   | AB<br>CB 325×190×250         |
| WTC150      | 560                     | 14.5                | 220-240/50    | 1.1               | 1.5 | 5.8          | 48.5or50                     | 9.0               | AA<br>CA 365×190×250         |
|             |                         |                     |               |                   |     |              |                              |                   | AB<br>CB 325×190×250         |
| WTC200      | 620                     | 16                  | 220-240/50    | 1.5               | 2.0 | 7.0          | 48.5or50                     | 10                | AA<br>CA 365×190×250         |
|             |                         |                     |               |                   |     |              |                              |                   | AB<br>CB 325×190×250         |

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

| 序号<br>NO. | 名称<br>Name                                                        |
|-----------|-------------------------------------------------------------------|
| 1         | 接头螺母 Tie-in Nut                                                   |
| 2         | 接头 Tie                                                            |
| 3         | O形圈 O-Ring                                                        |
| 4         | 十字盘头螺钉和平垫圈组合件 cross recessed pan head screw and washer assemblies |
| 5         | 泵盖 Pump Cover                                                     |
| 6         | 叶轮 Impeller                                                       |
| 7         | 机械密封 Mechanical seal                                              |
| 8         | O形圈 O-Ring                                                        |
| 9         | 泵壳 Pump Casing                                                    |
| 10        | 电机 Motor                                                          |

